


VMN 3.5 - 5.5

Vertical Line

Built with stainless steel sides that are 5mm thick, Nogueira's 3.5 / 5.5 m³ Vertical Mixers are highly resistant to corrosion and wear, prolonging their useful life and minimizing repairs and maintenance.

They have a vertical thread with 9 blades and 2 counter blades with 5 configurations that allow better efficiency in fiber cutting and uniformity in the mixture, thus reducing waste in the trough, increasing meat consumption and productivity or milk.

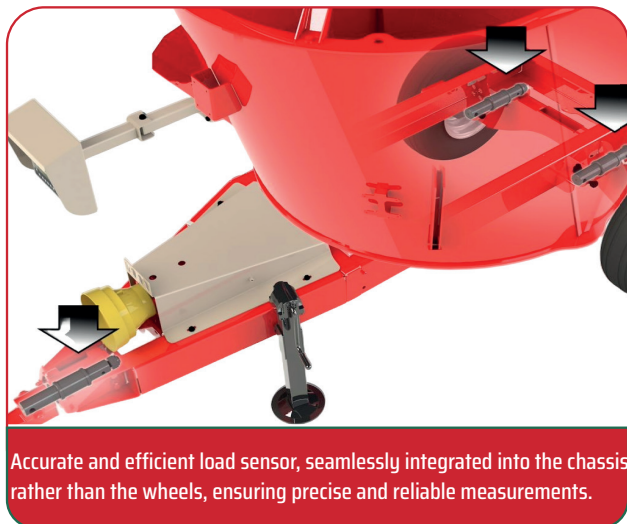

Accurate and efficient load sensor, seamlessly integrated into the chassis rather than the wheels, ensuring precise and reliable measurements.



Technical features	VMN 3.5 VERTICAL	VMN 5.5 VERTICAL
Production	3.5 m ³	5.5 m ³
Drive	Tractor	Tractor
Recommended Power at PTO	50 hp	55 hp
Required revolution at PTO	540 rpm	540 rpm
Height	2.180 mm	2.525 mm
Belt discharge belt	Hasta 780 mm	870 a 1200 mm
Gravity discharge belt	400 a 545 mm	500 a 645 mm
Width	3.570 mm	3.770 mm
Height with silage loader opened	2.650 mm	2.650 mm
Belt discharge side	Left (optional)	Left (optional)
Gravity discharge side	Right/ Left / Both (optional)	Right/ Left / Both (optional)
Weight with belt included	1.840 kg	2.237 kg
Inox	Mixing tub	Mixing tub
Wheels	10.5/65-16 RA 28 8 tire canvas	400/60 R15,5 (HF75) (T404)