


SOFT DUO 1300 - 1600

Fixed rate

Fertilizers and Distributors

SOFTDUO 1300 and SOFTDUO 1600 are your guarantee of precision and performance! The new **Soft Duo 1300/1600 Fixed Rate** now features:

- ✔ Hydraulic openings system regulated by a solenoid valve control, allowing for a more uniform and precise distribution, regardless of the rotation and speed of the tractor's movement, correcting application flaws by transitioning to a simple, efficient, and highly accurate application.
- ✔ Equipped with a robust chassis and the well-known structure of Soft Duo. The distribution disks are made of stainless steel, providing superior durability against any applied product, such as corrosive substances, for example.
- ✔ It has a set of linear actuators (hydraulic pistons) that allow independent opening and closing of the dosing outlets, regardless of the tractor's speed, maintaining a fixed application rate. It also has eccentric agitators, which do not harm the products and ensure excellent application.
- ✔ It features a digital controller that handles distribution control via GPS, ensuring that the application is carried out exactly as programmed from the beginning to the end of the job.

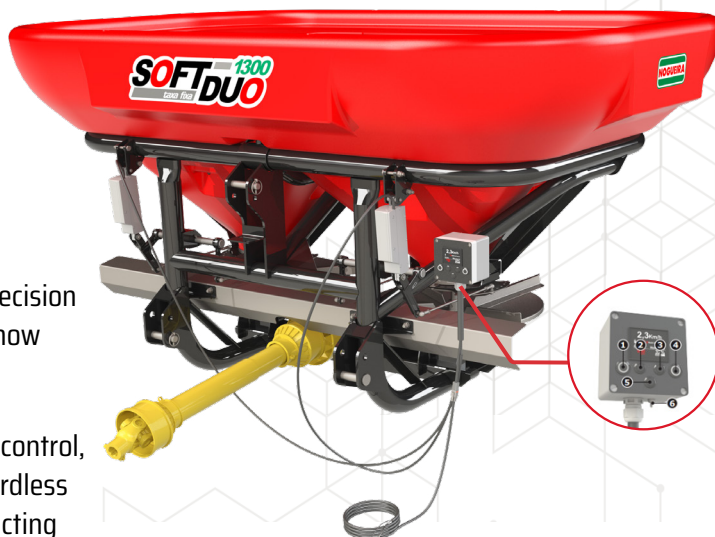


Available now with a capacity of


1600 liters



Automated distribution control for greater efficiency

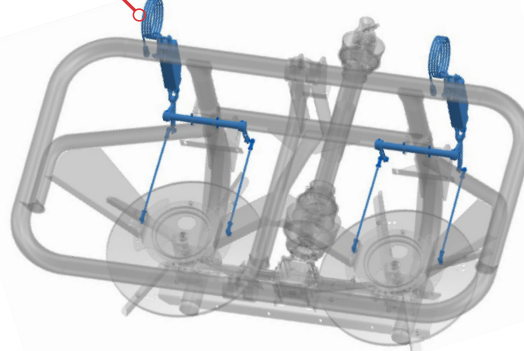

Discs that allow launching from 16 to 36 mm with uniform distribution

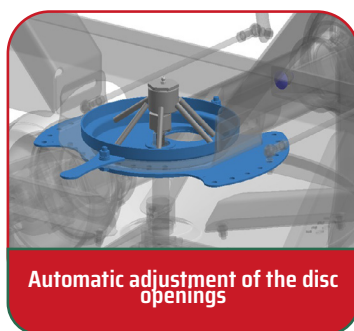

Automatic adjustment of the disc openings

Technical Features	SOFT DUO 1300 FIXED RATE	SOFT DUO 1600 FIXED RATE
Working width	From 16 to 36 m	From 16 to 36 m
Required revolution at PTO	540 rpm	540 rpm
Required power at PTO	30 hp	30 hp
Volumetric capacity	1300 lt	1.600 lt
Weight	283,6 kg	288,6 kg
Max. loading capacity	1800 kg	2100 kg
Side length	2,2 m	2,2 m
Width	1517 mm	1517 mm
Height	1292 mm	1386 mm